

A1 Flash Memory Controller

A1

*hyperston*<sup>®</sup>



# A1

## Flash Memory Controller

The Hyperstone A1 family of Flash Memory Controllers together with provided application and flash specific firmware offers an easy-to-use turnkey platform for high endurance flash disks of various form factors and interface standards.

- Patented superior read and write wear leveling together with up to 24-Bit ECC ensuring highest reliability and endurance
- Exceptional power fail robustness
- Optimized 32-Bit RISC core, instruction set and firmware for flash handling
- Dual channel controller provides optimal performance
- Most power efficient design together with power saving features
- S.M.A.R.T. features supported
- ASSP with minimal external active components
- Turnkey solution including firmware, manufacturing kit, test and development hardware, and reference schematics for CF card or 2.5" solid state disk
- Custom features can be implemented with simple firmware upgrades

### Targeted Applications

- High reliability & industrial Compact Flash™ Cards (CFC)
- Solid State Disks (SSD)
- IDE Disk-on-Modules (DoM)
- Embedded Flash
- Multi-Chip-Modules (MCM)
- Multi-Chip-Package (MCP)
- PCMCIA or ATA PC cards
- Disk-on-Board


### Order Information

- A1-LBT06 --- TQFP 128, 16 CEs, RoHS, 0 to +70 °C
- A1-ILBT06 --- TQFP 128, 16 CEs, RoHS, -40 to +85 °C
- A1-LBT06U --- TQFP 128, 8 CEs, ISO7816, UART, RoHS, 0 to +70 °C
- A1-ILBT06U --- TQFP 128, 8 CEs, ISO7816, UART, RoHS, -40 to +85 °C
- A1-LBL07 --- LQFP 144, 16 CEs, RoHS, 0 to +70°C
- A1-ILBL07 --- LQFP 144, 16 CEs, RoHS, -40 to +85°C
- A1-0BBD0 --- KGD / Wafer, 16 CEs, ISO7816, UART

### Compliance & Performance

- Fully compliant to CompactFlash™ 4.1 and compatible to 5.0 specifications
- Fast ATA supporting PIO mode 6, MDMA mode 4, UDMA mode 6 in True-IDE mode
- PCMCIA specification version 2.1
- Configurable as removable, hot swappable, and fixed drive
- Sustained read up to 60 MB/s
- Sustained write up to 60 MB/s
- 4K random write IOPS: up to 300
- Host data transfer rate in PIO mode 6 or MDMA mode 4 up to 25 MB/s
- Host data transfer rate in UDMA mode 6 up to 133 MB/s
- CF current consumption < 100mA

## A1 Block Diagram

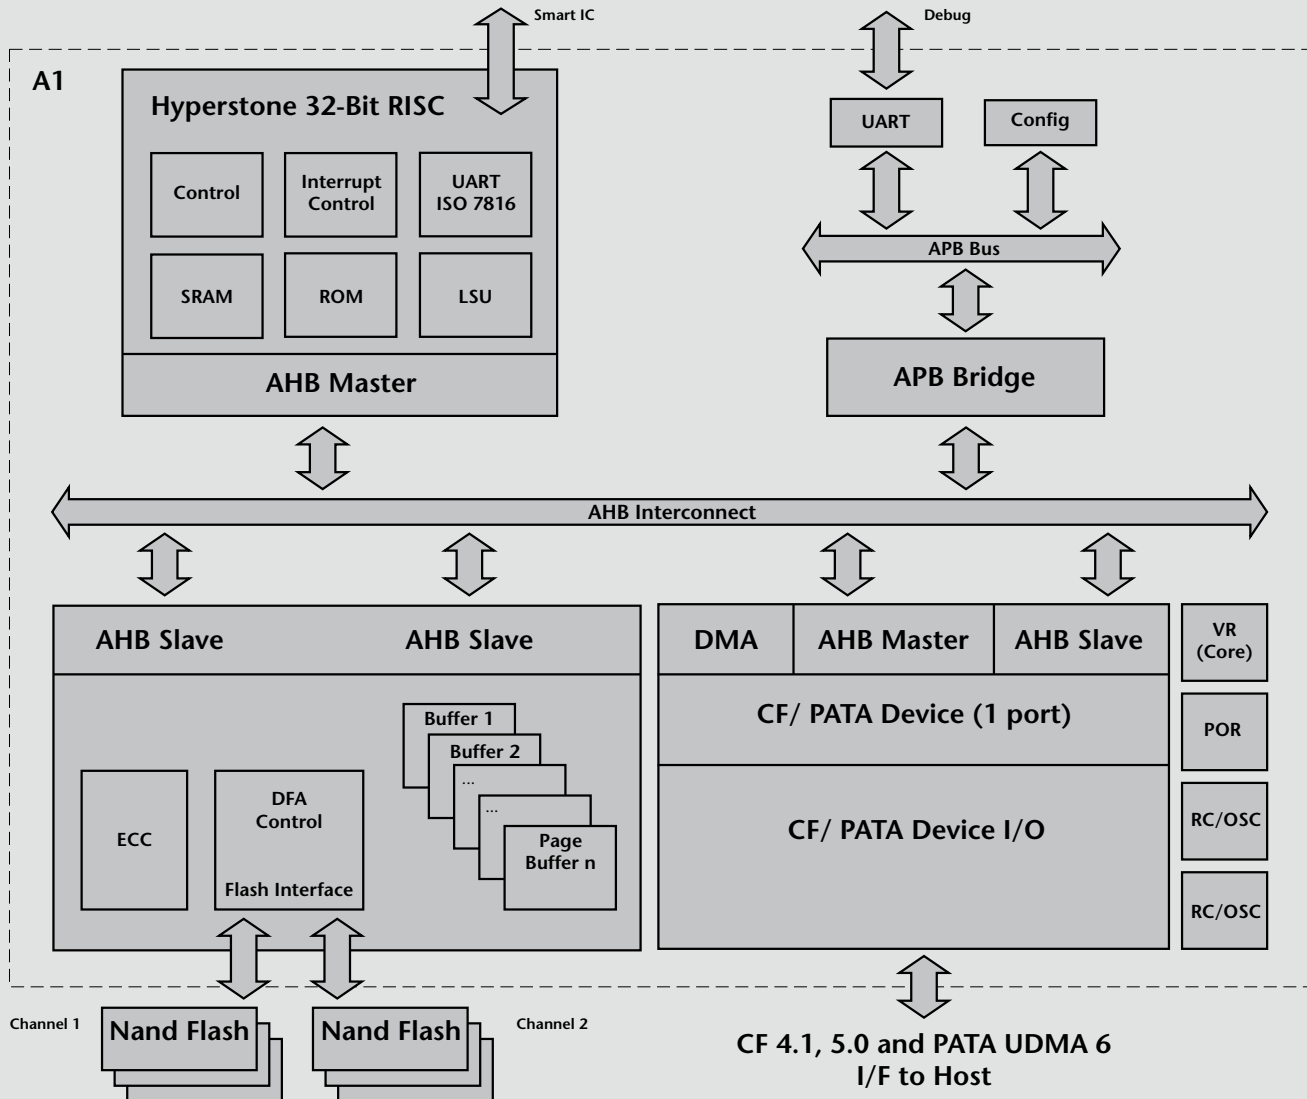

## Controller & CPU

- High performance 32-Bit Hyperstone RISC microprocessor
- 20 to 80 MHz clock frequency using adjustable internal oscillator
- Large internal RAM provides firmware flexibility
- Supply voltage  $3.3V \pm 10\%$
- 5V tolerant host side I/O
- On-chip switching voltage regulator for 1.5V core power supply
- Internal voltage detector

## Host Interface & Compliance

- Fully compliant to CompactFlash™ 4.1 and compatible to CF 5.0 specifications
- Fast ATA supporting PIO mode 6, MDMA mode 4, UDMA mode 6 in True-IDE mode
- PCMCIA specification version 2.1
- Configurable as removable, hot swappable, and fixed drive
- Memory mapped or I/O operation
- Automatic sensing of PCMCIA or True-IDE mode
- PCMCIA attribute memory
- PCMCIA configuration option register, card configuration and status register and pin replacement register support

## Flash Memory Interface & Handling

- Dual channel with two direct flash memory access (DFA) units including sector buffers and interleaving capability
- Supporting all control signals for NAND type flash memory connection
- Asynchronous SDR interface, ONFI 1.0 compliant and compatible with ONFI 2.x.

- Supporting direct connection of up to 16 flash memory chip enables (CE) - eight per channel
- Flash memory power down logic and flash memory write protect control
- BCH Error Correcting Code (ECC) capable of correcting 6 or 8 Bit in a 512 bytes sector and 24 Bit in a 1024 bytes double-sector with additional CRC
- Supporting all flash technologies MLC and SLC
- LBA 48 Support to design drives larger than 128GB
- Power down detection for increased power cycling robustness
- Capacitor buffered power down and write recovery possible
- Automatic power-down during wait periods, power saving including automatic wake-up and sleep mode with  $I_{cc} < 1 \text{ mA}$
- CF current consumption  $< 100 \text{ mA}$
- Flash management including mapping of logical block addresses (LBA) to corresponding physical block addresses (PBA)
- Bad Block Management
- Minimal Write Amplification
- Static and Global Wear Leveling to maximize write endurance
- Read Wear leveling to maximize data retention and refresh data subject to read disturbance
- Sudden power-fail management
- Interleaving, cache, and multi-plane programming
- Firmware is stored in NAND Flash and loaded into internal memory by the boot ROM
- Firmware can be stored redundantly for recovery and for periodic refresh
- Future Flashes can be supported by simple firmware upgrades
- Customized firmware, optimizations and feature implementations possible upon request



**Hyperstone GmbH**

Line-Eid-Strasse 3  
78467 Konstanz  
Germany  
Phone: +49 7531 98030  
Fax: +49 7531 980338  
Email: [info@hyperstone.de](mailto:info@hyperstone.de)

**Hyperstone Inc. - USA**

465 Corporate Square Drive  
Winston-Salem, NC 27105  
USA  
Phone: +1 336 744 0724  
Fax: +1 336 744 5054  
Email: [us.sales@hyperstone.com](mailto:us.sales@hyperstone.com)

**Hyperstone Asia Pacific - Taiwan**

3F., No. 501, Sec.2, Tiding Blvd.  
Neihu District, Taipei City 114  
Taiwan, R.O.C.  
Phone: +886 2 8751 0203  
Fax: +886 2 8797 2321  
Email: [taiwan@hyperstone.com](mailto:taiwan@hyperstone.com)

[www.hyperstone.com](http://www.hyperstone.com)

Content is subject to change without prior notice. A1 is a trademark of Hyperstone GmbH. Other brand, product, or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded unless part of a separate written contract.