

U8 Flash Memory Controller

U8

hyperston® 

U8

Flash Memory Controller

The Hyperstone U8 family of Flash Memory Controllers together with provided application and Flash specific firmware offers an easy-to-use turnkey platform for industrial, high endurance robust Flash Memory cards or modules compatible to host systems with USB 2.0 interface.

- Designed to satisfy industrial requirements
- **hyReliability™** Flash Management including superior wear leveling, read disturb management, and power fail management ensuring highest reliability and endurance
- **hyMap®** Flash Translation Layer and mapping offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles (e.g. JEDEC Enterprise)
- Continuously updated Flash Memory chip support and long term availability
- Flexible 96-Bit/1K BCH ECC engine supporting all Flash Memory requirements
- Optimized 32-Bit RISC core, instruction set for Flash Memory handling
- High performance on-the-fly AES 128 and 256 encryption engine, CBC, XTS modes, Hardware RNG
- Custom features can be implemented with simple firmware upgrades
- 16 GPIO for customer specific applications supporting SPI, I²C, and ISO7816
- Turnkey solution including firmware, manufacturing kit, test and development hardware, as well as reference schematics

Targeted Applications

- Industrial USB Flash Drive
- eUSB, embedded USB module
- Ultra durable Flash Drive
- Security Flash Drive
- Multi-Chip-Package (MCP)
- Disk-on-Board


Compliance & Performance

- Fully compliant with USB 2.0 specifications
- USB mass storage device class (MSC)
- High-Speed, Full-Speed,
- Secure Erase support
- S.M.A.R.T feature support
- Host transfer rate of up to 480 MBit/s
- Sequential read and write up to 35 MB/s

Order Information

- U8-RAQ03 --- QFN 76, 9x9mm, 8 CEs, RoHS, -40 to +85 °C
- U8-0ABD0 --- Tested Die/Wafer

U8 Block Diagram

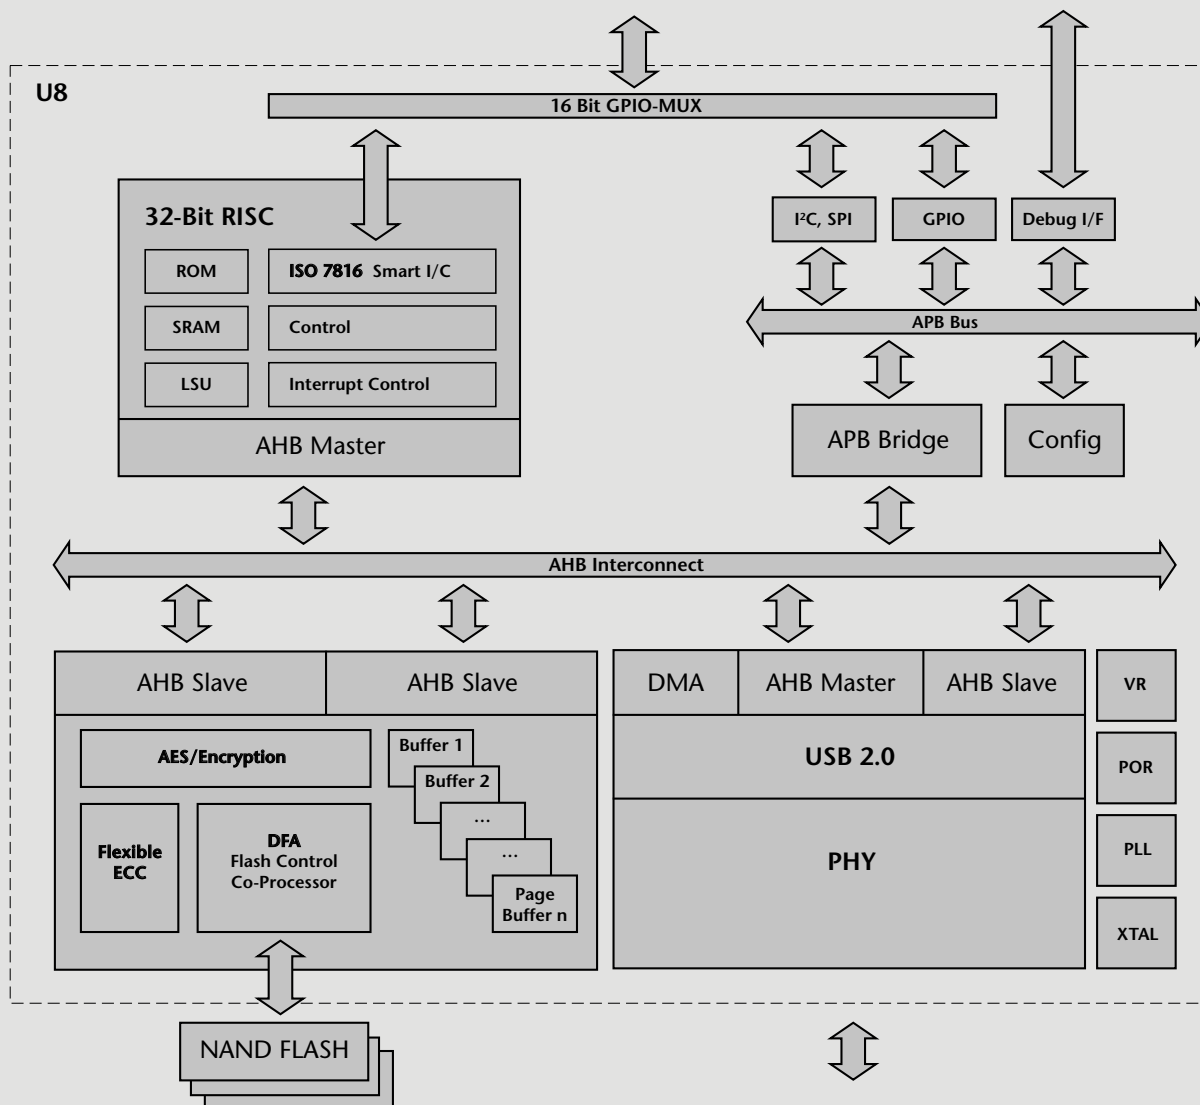

Controller & CPU

- High performance 32-Bit Hyperstone RISC microprocessor
- Large internal RAM provides firmware flexibility
- 16 GPIO pins for customer specific applications, multiplexed interface options include: 16 GPIO, SPI, I²C, 4x CE and ISO7816
- Unique ID for security applications
- AES encryption engine 128 and 256-Bit, CBC, and XTS modes supported, high performance on-the-fly encryption/decryption
- Hardware RNG
- Flexible clock frequency generation through internal PLL combined with clock multi divider.
- Automatic power-down mode during wait periods for host data or Flash Memory operation completion, automatic sleep mode during host inactivity periods
- On-chip voltage regulator for 3.3V to 1.2V controller core power supply
- Current consumption in suspend mode: 0.7 mA (typical)

Host Interface & Compliance


- Fully compliant with USB 2.0 specifications
- USB mass storage device class (MSC)
- USB human interface device class (HID) support is possible
- 4 configurable endpoints
- Hi-speed, Full speed, Low speed possible
- Bulk, isochronous, and interrupt transfer modes
- S.M.A.R.T., Sanitize, and Secure Erase support using ATA pass through command
- Configurable Early-Acknowledge to avoid any data loss during power fail.

Flash Memory Interface

- Direct Flash Memory Access (DFA) co-processor including page buffers and interleaving capability
- Synchronous DDR interface compliant with Toggle DDR and ONFI 2.3, compatible with all DDR Flash Memory devices
- Asynchronous SDR interface, ONFI 1.0 compliant, compatible with all legacy interface Flashes
- Data transfer rate to Flash up to 133 MB/s
- Flexible 96-Bit/1K BCH ECC engine
- CRC for additional reliability
- Direct connection of up to 8 Flash Memory chip enables (CE)
- Flash Memory power down logic and write protect control
- Supporting all Flash technologies and all page sizes up to 16KB
- On-chip voltage regulator for 1.8V Flash Memory I/O power

Flash Memory Management

- hyReliability™ Flash Memory Management optimizing reliability, power fail safety, endurance, data retention and performance
- hyMap® Flash Translation Layer and mapping offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles (e.g. JEDEC Enterprise)
- Optimized for fast boot-up times
- Bad Block Management
- Static and Global Wear leveling to maximize write endurance
- Inherent on-the-fly garbage collection
- Read Disturb Management, Dynamic Data Refresh to maximize data retention, and data refresh subject to read disturbance
- Management of sudden power-fails
- Interleaving, cache, and multi-plane programming
- Firmware is stored redundantly for recovery and refresh
- In-Field Firmware update without user data loss
- Customized firmware, optimizations and feature implementations possible upon request.

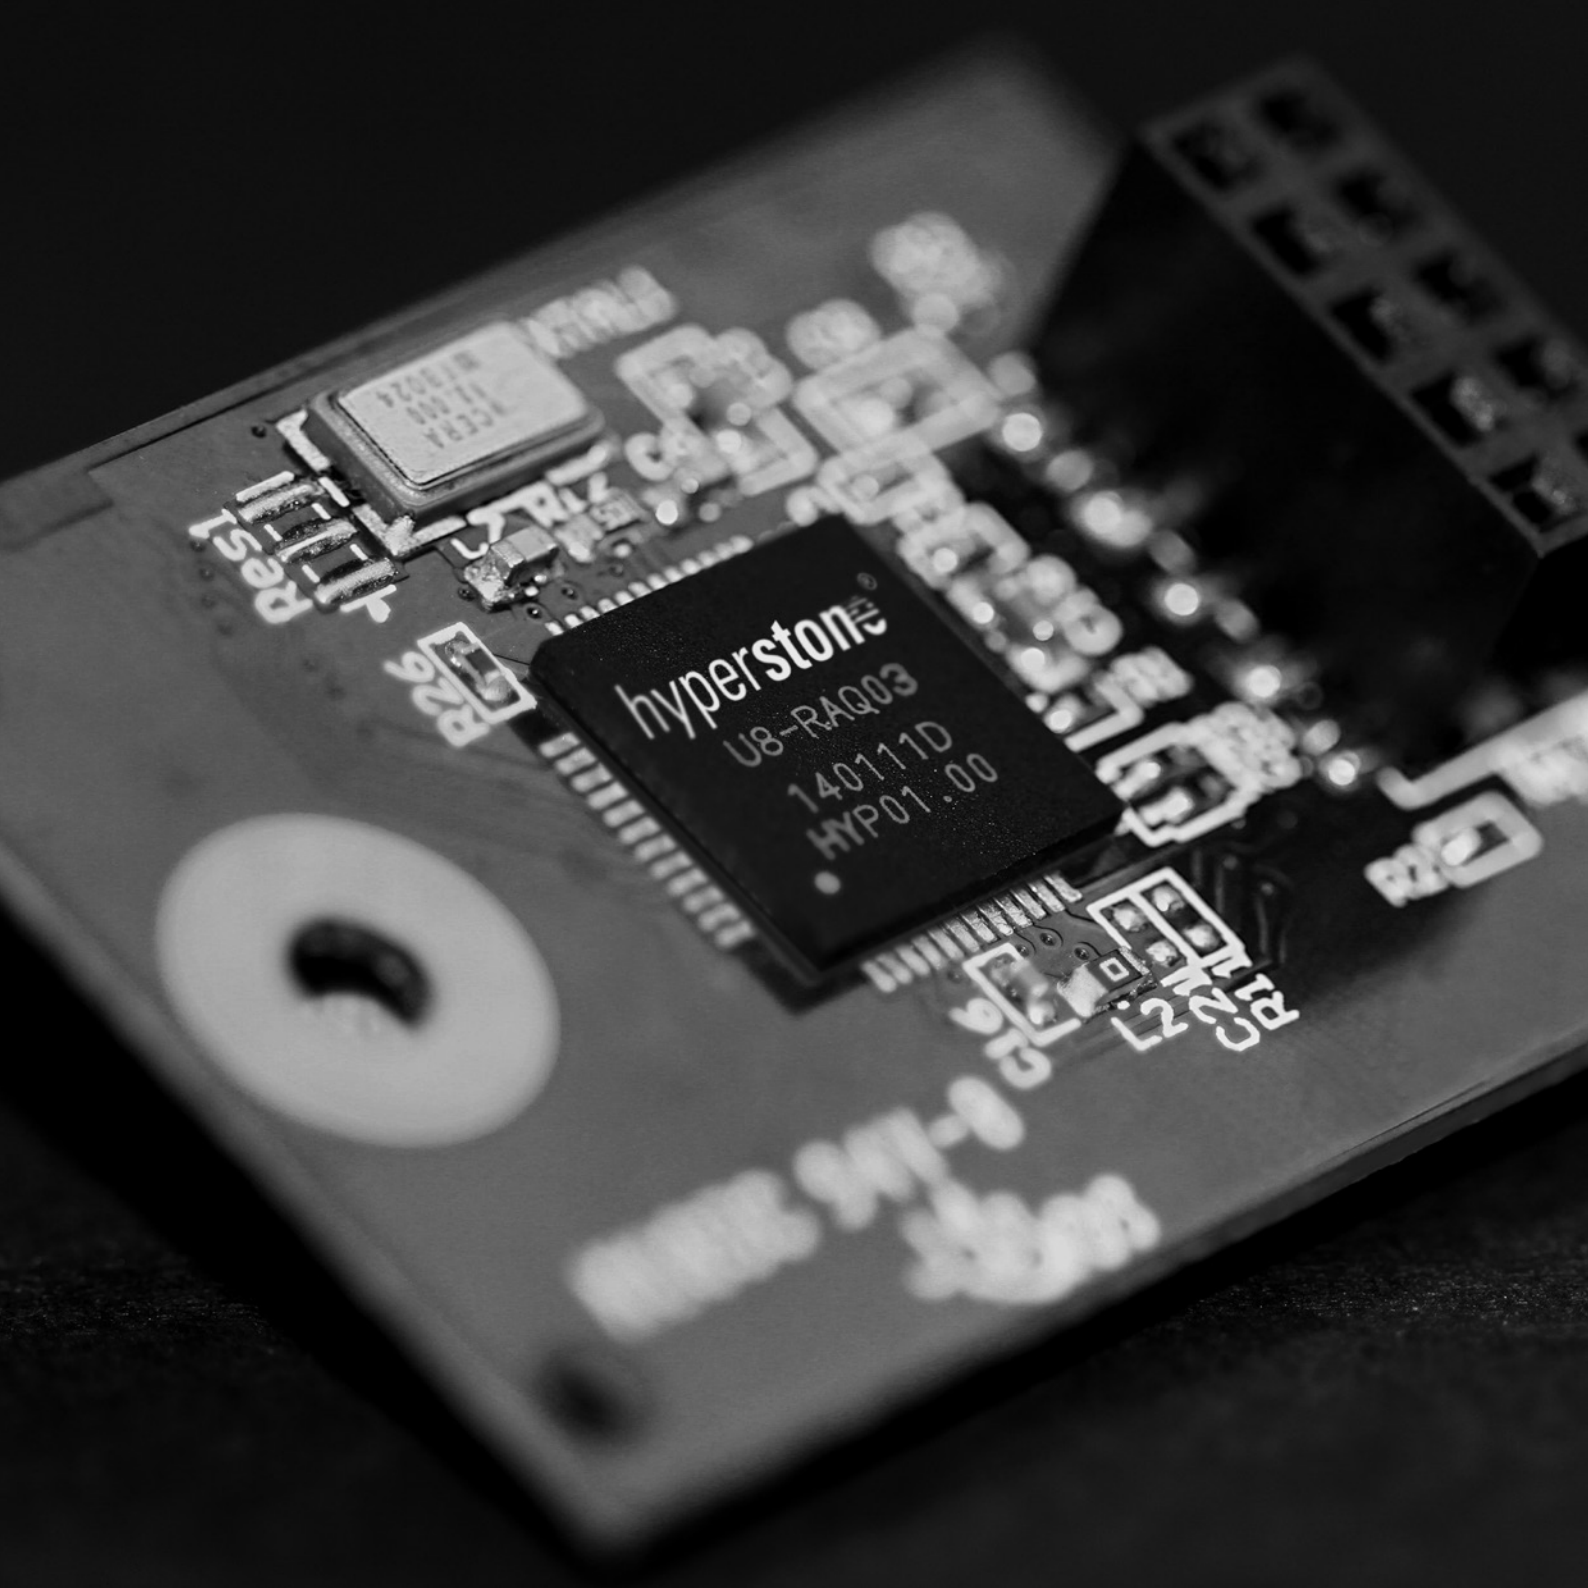

hyperstone®
U8-RAQ03
140111D
HYP01.00

P11
P12
P13

P14
P15

P16
P17
P18
P19
P20
P21
P22
P23
P24
P25
P26
P27
P28
P29
P30
P31
P32
P33
P34
P35
P36
P37
P38
P39
P40
P41
P42
P43
P44
P45
P46
P47
P48
P49
P50
P51
P52
P53
P54
P55
P56
P57
P58
P59
P60
P61
P62
P63
P64
P65
P66
P67
P68
P69
P70
P71
P72
P73
P74
P75
P76
P77
P78
P79
P80
P81
P82
P83
P84
P85
P86
P87
P88
P89
P90
P91
P92
P93
P94
P95
P96
P97
P98
P99
P100

U8-RAQ03
140111D
HYP01.00



Hyperstone GmbH

Line-Eid-Strasse 3
78467 Konstanz
Germany
Phone: +49 7531 980 30
Email: eu.sales@hyperstone.com

Hyperstone Inc. - USA

486 N Patterson Ave Suite 301
Winston-Salem, NC 27101
USA
Phone: +1 336 744 0724
Email: us.sales@hyperstone.com

Hyperstone Asia Pacific - Taiwan

3F., No. 501, Sec.2, Tiding Blvd.
Neihu District, Taipei City 114
Taiwan, R.O.C.
Phone: +886 2 8751 0203
Email: ap.sales@hyperstone.com

www.hyperstone.com

Content is subject to change without prior notice. U8, hyReliability are trademarks of Hyperstone GmbH. Other brand, product, or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded until part of a separate written contract.